


# Grid Coupler with 28mm receiver 38-52 mm

Reference: GCX-GRIDCLJUN3852



- Opening diameters: 38 mm - 52 mm
- Spigot 28 mm receiver
- Securing bolt for inserted 28 mm stud
- For hanging lights with 28 mm junior stud
- As: LC.465A, LC.4465A, 425151

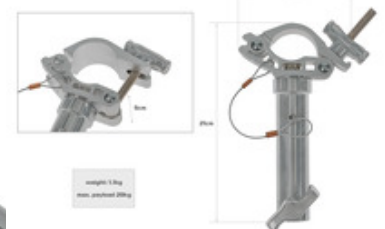

## Product description:

Eye grid coupler with 28 mm (1-1/8") receiver for studio & stage to hang by truss / tube pipes system larger lights or other studio gear with a 28 mm stud.

The grid coupler works for tubes with diameters between 38 and 52 mm and is able to support a payload of max 20 kg.

The 28 mm receiver has a depth of 130 mm and uses a pass-through pin for additional securing of the attached equipment.

Similar with LC.465A, LC.4465A, 425151

## Technical Specifications:

## Grip &amp; Mounting

Grip type	Pipe Coupler
Mounting	Receiver 28mm (1-1/8")
Openings	38-52 mm
Max opening	52 mm
Maximum payload	20 kg
Overall size	23 x 15 x 5 cm
Color	Chrome
Material	Steel alloy
Weight	1.1 kg