


KIT CineFlex "L" - Single

Reference: LLK-CINEFLEXLKIT



- Power: 100W
- Light output: 3150lx @ 1m
- Color temperature: 3000K-5600K | CRI 96 TLCI 98
- Size & weight: 60 x 40 x 1 cm | 560 g
- External power controller w/ touch digital display
- Includes: softbox, dome, remote, stand & case

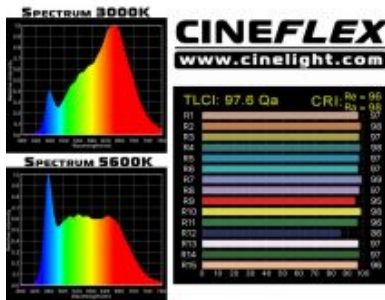

package content:

- 1x CineFLEX L Bi-Color
- 1x Power controller
- 1x Light stand 200cm
- 1x Diffusion dome
- 1x Softbox kit
- 1x Wireless remote control
- 1x Hard transport case



Product description:

CineFLEX "L" Bi-Color

- flexible, slim and lightweight LED mat, can be used in a variety of shapes (arc, cylindrical)
- bi-color SMD LEDs 3000K - 5600K, dimmable 100%-10%
- high CRI 96 | TLCI 98 index for natural color rendering on cameras
- remote controlling through built-in DMX512 function or optional 2.4G wireless remote
- Velcro back edgings for mounting in a variety of places
- external power controller with digital display
- can be mounted on a light stand using the included X-cross back frame

Diffuser Dome CineFLEX "L"

- same effect as a lantern light / China ball
- reduces hard shadows and creates a wide beam of soft
- easy mounting with Velcro edge straps
- collapsible design
- use for portraits and product photography

Softbox Kit CineFLEX "L"

- includes front diffusion & honeycomb
- front diffusion for smooth shadows
- honeycomb grid for directional soft light

Touch Screen Remote for CineFLEX

- 2.4G wireless remote control
- digital display with intuitive controls
- adjusts color temperature & brightness values
- effective control distance is up to 50 m
- controls up to 999 devices remotely

Light Stand 200 cm - Reversible Legs

- payload: 2.5 Kg
- maximum height: 200 cm
- folded length: 49 cm
- mounting: spigot 16mm (5/8" stud)
- material: aluminum

Product features:

Rated power: 100 watts
Beam type: flood
LED type: Bi-Color
Voltage input: 15V
Color temperature: 3000K-5600K
CRI rating: 96
TLCI rating: 98
Beam angle: 120
Photometrics : 1m: 3150 lx | 2m: 910 lx | 3m: 450 lx
LED no: 504
Dimming range: 100%-10%
Display type: Complex - monochrome

Battery mount: V-Lock
Plug in connector type: XLR-4P - male
Cooling system: Passive
Power source: External, AC 100-240V 50 / 60 HZ
Power connector type: CEE 7/7
Power cord total length: 5.0 m
Local functions control: Touch screen
DMX control: Yes
DMX connectors type: Ethernet RJ-45
WIFI control : No
Remote control : Yes
Yoke mount: Spigot 16mm receiver
Housing material: Cordura
Housing color: Black
Lamp head weight: 0.5 kg
Lamp head dimensions: 60 x 40 x 1 cm
Controller dimensions: 27.5 x 12.5 x 8 cm
Controller weight: 1.1 kg
No of heads: 1
KIT case size: 100 x 22 x 14 cm
KIT include stands?: Yes
KIT heads type: Flood lights
KIT total power: 100 watts