


# KIT CineFlex "XL" - Single

Reference: LLK-CINEFLEXXLKIT



- Power: 150W
- Light output: 4150lx @ 1m
- Color temperature: 3000K-5600K | CRI 96 TLCI 98
- Size & weight: 61 x 61 x 1 cm | 700 g
- External power controller w/ touch digital display
- Includes: softbox, dome, remote, stand & case

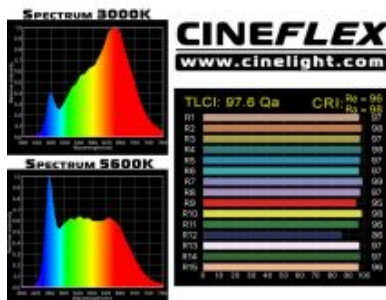

## Product description:

CineFLEX "XL" Bi-Color

- flexible, slim and lightweight LED mat, can be used in a variety of shapes (arc, cylindrical)
- bi-color SMD LEDs 3000K - 5600K, dimmable 100%-10%
- high CRI 96 | TLCI 98 index for natural color rendering on cameras
- remote controlling through built-in DMX512 function or optional 2.4G wireless remote
- Velcro back edgings for mounting in a variety of places
- external power controller with digital display
- can be mounted on a light stand using the included X-cross back frame

### Diffuser Dome CineFLEX "XL"

- same effect as a lantern light / China ball
- reduces hard shadows and creates a wide beam of soft
- easy mounting with Velcro edge straps
- collapsible design
- use for portraits and product photography

### Softbox Kit CineFLEX "XL"

- includes front diffusion & honeycomb
- front diffusion for smooth shadows
- honeycomb grid for directional soft light

### Touch Screen Remote for CineFLEX

- 2.4G wireless remote control
- digital display with intuitive controls
- adjusts color temperature & brightness values
- effective control distance is up to 50 m
- controls up to 999 devices remotely

### Light Stand 200 cm - Reversible Legs

- payload: 2.5 Kg
- maximum height: 200 cm
- folded length: 49 cm
- mounting: spigot 16mm (5/8" stud)
- material: aluminum

### Product features:

Rated power: 150 watts  
Beam type: flood  
LED type: Bi-Color  
Voltage input: 15V  
Color temperature: 3000K-5600K  
CRI rating: 96  
TLCI rating: 98  
Beam angle: 120°  
Photometrics : 1m: 4150 lx | 2m: 1250 lx | 3m: 635 lx  
LED no: 756  
Dimming range: 100%-10%

Display type: Complex - monochrome  
Battery mount: V-Lock  
Plug in connector type: XLR-4P - male  
Cooling system: Passive  
Power source: External, AC 100-240V 50 / 60 HZ  
Power connector type: CEE 7/7  
Power cord total length: 5.0 m  
Local functions control: Touch screen  
DMX control: Yes  
DMX connectors type: Ethernet RJ-45  
WIFI control : No  
Remote control : Yes  
Yoke mount: Spigot 16mm receiver  
Housing material: Cordura  
Housing color: Black  
Lamp head weight: 0.7 kg  
Lamp head dimensions: 61 x 61 x 1 cm  
Controller dimensions: 27.5 x 12.5 x 8 cm  
Controller weight: 1.1 kg  
No of heads: 1  
KIT case size: 120 x 22 x 14 cm  
KIT include stands?: Yes  
KIT heads type: Flood lights  
KIT total power: 150 watts