

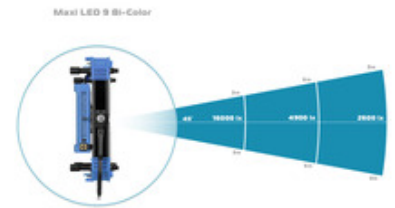


# Maxi LED 9 - Bi-Color

Reference: LLP-MAXILED9BCK



- Power: 1400 watts
- Light output: 16000 lx @ 3m
- CCT: 2600K-6000K
- 9 pixel individual control
- Wired DMX & Wireless CRMX
- CRMX LumenRadio W-DMX
- Stand mounted or hanged operation
- Softbox with grid, black & white skirts
- Stage Dino LED Light, LED Spacelight



## Product description:

The MAXI LED 9, also known on film sets as Dino Light 9, is a high-output LED fixture designed to provide soft light over large area. The MAXI LED 6 delivers up to 1400W power from the 9 separate LED arrays. These LED arrays work simultaneously to provide adjustable color temperature from 2600K – 6000K, and a smooth dimmable output from 0% – 100% with no green or magenta shift at any brightness or CCT setting. Additionally in Pixel Mode is it possible to control the Maxi LED in different ways: banks, rows or individually with full control of each LED spotlight, great for visual lighting effects.

Adjusting the brightness, color temperature, FX or other settings can be done locally, from the back panel controller using an intuitive color menu system or remotely via wired DMX protocol and wirelessly via W-DMX CRMX / LumenRadio protocol. Additionally, the light can be controlled using a phone or tablet (IOS & Android) over WIFI 2.4Ghz network. Different control options are key in today's stage, tv studios & film making industry.

In front of the LED's there is a Fresnel lens installed which ensures a smooth & uniform light within the beam area.

The steel and aluminum materials used to build the MAXI LED 9 body contribute to a relative low weight of the fixture and also makes it robust to withstand the intensive studio use. Suitable for stage & film lighting rental companies,

A combination of passive & active cooling systems provides excellent heat management with minimal sound. The low noise fan will start to spin only after the setpoint temperature of 70° is reached.

The new MAXI LED series is aimed to replace the classic incandescent Maxi-Brute lights at a fraction of the energy consumption. Particularly, the MAXI LED 4 & 6 can easily replace the classic Space Light 3KW and 6KW when hanged by the chains & combined with the included skirt set.

The fixture includes a "U" support yoke fitted with a 28mm stud for rigging on a junior / senior light stand like traditional Maxi-Brute / studio Dino lights.

- 14 built-in FX programs, customizable
- 9-Pixel mode control (individual head control for CCT & LUX)
- 4 dimming curves (linear / exponential / logarithmic / "s")
- 4 DMX profiles (3 / 4 / 9 / 11 channel allocation)
- 6 frequency options: 1 / 2 / 4 / 6 / 12 / 25 KHz
- Built-in wireless DMX support for CRMX by LumenRadio
- Wired & wireless master / slave control
- Quickly detachable controller from the backside

- Head only size & weight : 85 x 85 x 23 cm | 33 kg
- Overall size & weight (including yoke bar): 101W x 106H x 23D cm | 37 kg
- Flight case size: 116 x 106 x 31 cm
- Can be used hanged by the chains (included) or mounted on a stand using the yoke bar.
- Includes softbox with grid & transport hard case.
- Optional: black & white skirt set.

#### Package Content:

- 1 x Maxi LED 9 head
- 1 x Yoke "U" bar w/ 28mm stud
- 1 x PowerCon cable
- 4 x hanging wires
- 1 x Softbox with grid
- 1 x Flight case

## Technical Specifications:

## LED Panels - Fixture

|                   |  |
|-------------------|--|
| LED type          | Bi-Color                                 |
| LED no            | 9  |
| Beam angle        | 45°                                      |
| Beam type         | semi-flood                               |
| Photometrics      | 3m: 16000 lx   6m: 4900 lx   9m: 2600 lx |
| Color temperature | 2600K-6000K                              |
| TLCI rating       | 99                                       |
| CRI rating        | 98                                       |
| APP support       | Android & IOS                            |
| Dimming range     | 100%-0%                                  |
| Dimming curves    | Yes                                      |
| Wireless DMX      | CRMX                                     |
| Cooling system    | Active                                   |
| Display type      | Complex - color                          |

## LED Panels - Controls

|                              |               |
|------------------------------|---------------|
| Local functions control      | Analog        |
| DMX control                  | Yes           |
| DMX connectors type          | XLR-5P        |
| Wireless DMX                 | CRMX          |
| Dimming curves               | Yes           |
| Bluetooth / WIFI APP control | Yes           |
| APP support                  | Android & IOS |
| Radio remote control         | No            |

## LED Panels - Powering

|                         |                                  |
|-------------------------|----------------------------------|
| Rated power             | 1400 watts                       |
| Voltage input           | 100-240V 50 / 60 Hz              |
| Power source            | Internal, AC 100-240V 50 / 60 Hz |
| Battery                 | N/A                              |
| Battery mount           | N/A                              |
| Plug in connector type  | PowerCon                         |
| Power cord total length | 5.0 m                            |
| Power connector type    | CEE 7/7                          |

## LED Panels - Physical

|                      |                 |
|----------------------|-----------------|
| Yoke mount           | Spigot 28mm pin |
| Housing material     | Metal           |
| Housing color        | Black & blue    |
| Lamp head dimensions | 85 x 85 x 23 cm |
| Lamp head weight     | 33 kg           |